



SPEED QUEEN | PROFESSIONAL

# Washer-Extractor & Dryer for OPL

## SF

### Washer-extractors features

- Stainless steel outer and inner drum
- Industry-leading 440 G-Force extraction removes more moisture, minimizing drying times and utility costs
- Totally freestanding: can be installed on any floor and any level
- Suspension with new out-of-balance logic
- Soap box with four compartments
- Door opens 180° for easy loading and unloading
- Standard with drain pump, optional drain valve available
- Top and front panel available in Stainless steel
- Electrical heating or boiler-fed
- Soap supply injection allows easy connection with liquid soap pumps
- Longer lifetime: at least 15,000 cycles

### Quantum Controls

- 6 programs
- 3 cycle modifiers
- LED notification
- Programmable by Infra Red
- Time remaining countdown




## SD

### Dryers features

- Galvanized steel cylinder
- Oversized lint filter located in front for easy cleaning
- Powerful exhaust blower assures short drying times and low operating costs
- Wide door opening of 180° for easy loading and unloading
- Top and front panel available in stainless steel
- Electrical or gas heating

### Quantum Controls

- 4 drying programs
- LED notification
- Programmable by Infra Red




### Best-in-class Quantum® Gold Controls

Revolutionary Quantum® Gold technology combines equipment controls, programming and wireless networking into one full-store management system, including: wireless networking, adjustable water levels, "lucky cycle" feature, time of day pricing, customizable cycle modifiers, and in-depth reporting. Design to reduce costs and maximize revenue, Quantum gives you the power to achieve unprecedented levels of profitability.

## Connectivity

Wi-fi connectivity via accessory, enabling access to Speed Queen Insights and Speed Queen App



Fast cycles



Electronic Controls



Best Warranty



Lasts Longer




# Washer-extractor

## Specifications

	SF						
	SF3JLBS-P403UN01	SF3JLBS-G403UN01	SF3JLBS-P403UG01	SF3JLBJP403UG43	SF3JLBS-G403UG01	SF3JLBJ-G403UG43	SF3JLBSP-403NG22
Market	Europe/CE	Europe/CE	Europe/CE	Europe/CE	Europe/CE	Europe/CE	No agency
Voltage	400v/50Hz/3N	400v/50Hz/3N	400v/50Hz/3N	400v/50Hz/3N	400v/50Hz/3N	400v/50Hz/3N	230v/50Hz/1N
Control Location	45° front control	45° front control	45° front control	45° front control	45° front control	45° front control	45° front control
Color	Stainless	Stainless	Grey	Grey	Grey	Grey	Grey
Basket	Stainless	Stainless	Stainless	SS w/ injection	Stainless	SS w/ injection	Stainless
Drain	Pump	Gravity drain	Pump	Pump	Gravity drain	Gravity drain	Pump
Capacity	9.5 kg	9.5 kg	9.5 kg	9.5 kg	9.5 kg	9.5 kg	10.5 kg

		Washer Extractor
DRUM VOLUME	l	96,8
MOTOR		
Frequency controlled	kW	0,67
EXTRACTION SPEED	rpm	1200
G-FACTOR		440
ELECTRICAL HEATING		
Electrical	kW	4,8
TYPE OF CONTROL		Quantum
DIMENSIONS		
H×W×D	mm	1027×683×704
Net weight	kg	113
TRANSPORT DATA		
Volume (packed)	m <sup>3</sup>	0,71
Packed H×W×D		1150x760x860
Gross weight	kg	122
Ratio 1:9	kg	10,5

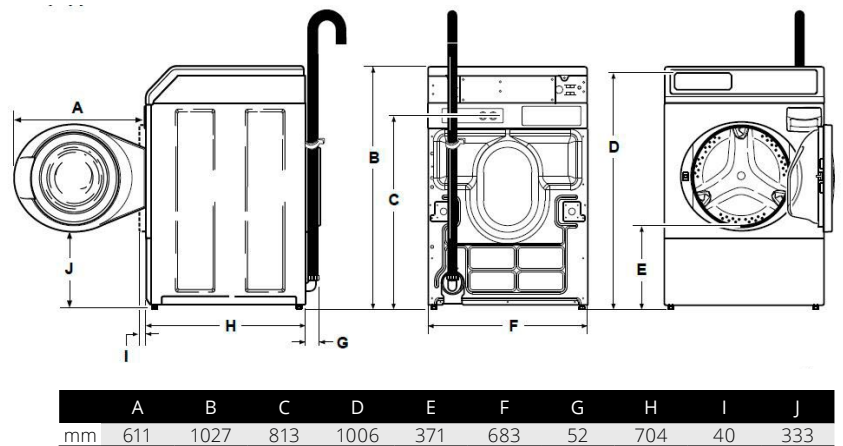

# Dryer

## Specifications

SD						
	SDGNLBGS303UG01	SD3NLBGS403UN01	SDENLBGS303UG01	SD3NLBGS403UG01	SDENLBGS543ZG01	ND3NXAGS403UN01
Market	Europe/CE	Europe/CE	Europe/CE	Europe/CE	Universal IEC	Europe/CE
Actuation	OPL <sup>1</sup> / PCP <sup>2</sup>	OPL <sup>1</sup> / PCP <sup>2</sup>	OPL <sup>1</sup> / PCP <sup>2</sup>	OPL <sup>1</sup> / PCP <sup>2</sup>	OPL <sup>1</sup> / PCP <sup>2</sup>	OPL <sup>1</sup> / PCP <sup>2</sup>
Heating	Gas	Electric	Electric	Electric	Electric	Electric
Voltage	230v/50Hz/1N	400v/50Hz/3N	230v/50Hz/1N	400v/50Hz/3N	220v/60Hz/1N	400v/50Hz/3N
Control type	Quantum	Quantum	Quantum	Quantum	Quantum	Quantum
Control Location	45° front control	45° front control	45° front control	45° front control	45° front control	10° Front Control
Color	Stainless	Grey	Grey	Grey	Grey	Stainless
Capacity	8.2kg	8.2kg	8.2kg	8.2kg	8.2kg	8.2kg

<sup>1</sup> On Premise Laundry

<sup>2</sup> Prep for Central Pay

		Dryer
DRUM VOLUME	l	198
ELECTRICAL HEATING	kW	5,2 (230V) 5,3 (400V)
GAS HEATING	kW	7,3
BASKET		Galvanized
DRAIN		Solid
DIMENSIONS		
H×W×D	mm	1027×683×711
Net weight	kg	68
TRANSPORT DATA		
Volume (packed)	m <sup>3</sup>	0,71
Packed H×W×D		1150x760x860
Gross weight	kg	73
Ratio 1:9	kg	10,5

